


Specifications/技术参数:

Electrical/电气特性:


Current Rating(额定电流): 1A  
 Withstand Voltage(耐压值): 500VAC for one minute  
 Contact Resistance(接触电阻): 20mΩ max  
 Insulation Resistance(绝缘电阻): 1000MΩ min  
 Operating Temperature(工作温度): -40°C ~ +105°C

Physical/物理特性:

Insulator(塑胶本体): P.B.T or PA6T +30% GF, Color Black  
 Flammability Rating(防火等级): UL 94V-0  
 Contacts(接触件): Brass  
 Contacts plating(接触件电镀): Gold flash over Nickel

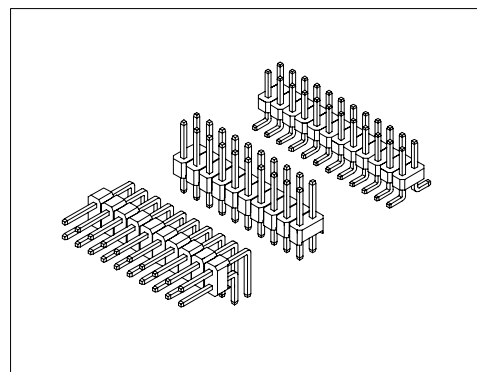


Dimension/尺寸: mm

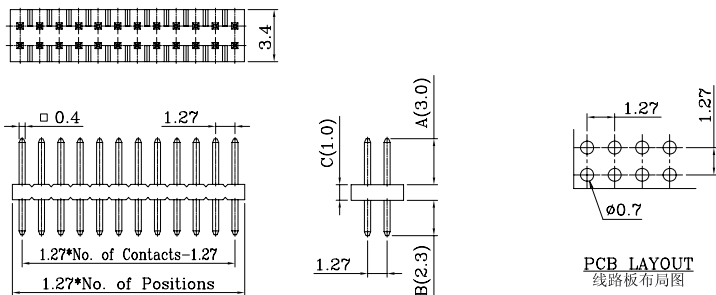


Dual row 06 to 100 contacts/双排6-100芯  
 0.4mm Square post/0.4mm四方针  
 Base height/塑体高度: 1.0mm standard

Ordering Code/订购型号:  
 201-1/B-S-2\*nPG-3.0/1.0/2.3

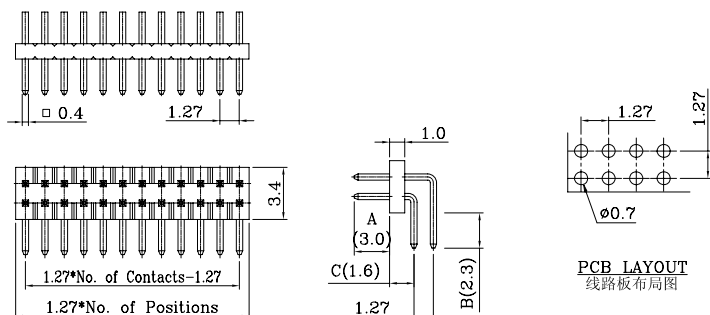


Dual row 06 to 100 contacts/双排6-100芯  
 0.4mm Square post/0.4mm四方针  
 Base height/塑体高度: 1.0mm standard

Ordering Code/订购型号:  
 201-1/B-R-2\*nPG-3.0/1.6/2.3

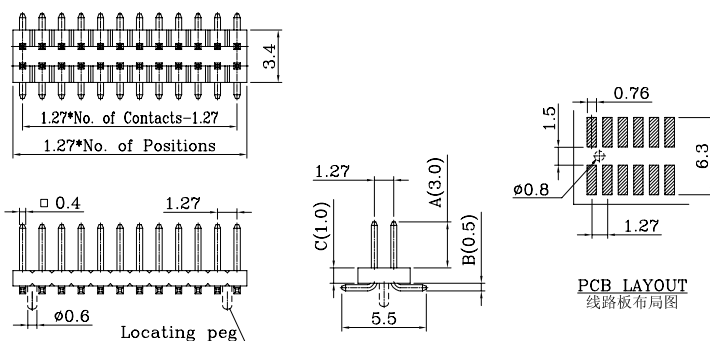


Dual row 06 to 100 contacts/双排6-100芯  
 0.4mm Square post/0.4mm四方针  
 Base height/塑体高度: 1.0mm standard  
 W1: With Locating peg/带定位柱


Ordering Code/订购型号:  
 201-1/B-SMS-2\*nPG-3.0/1.0/0.5-W1

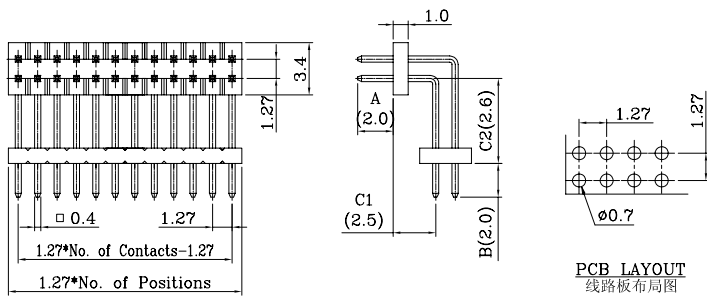


Dual row 06 to 100 contacts/双排6-100芯  
0.4mm Square post/0.4mm四方针  
Base height/塑体高度: 1.0mm standard  
Ordering Code/订购型号:  
201-1/B-DLR-2\*nPG-2.0/2.5+2.6/2.0-H1.0

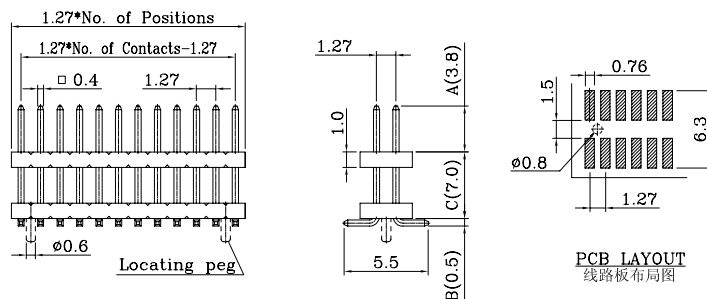




Dual row 06 to 100 contacts/双排6-100芯  
0.4mm Square post/0.4mm四方针  
Base height/塑体高度: 1.0mm standard  
W1: With Locating peg/带定位柱  
Ordering Code/订购型号:  
201-1/B-DLSMS-2\*nPG-3.8/7.0/0.5-W1

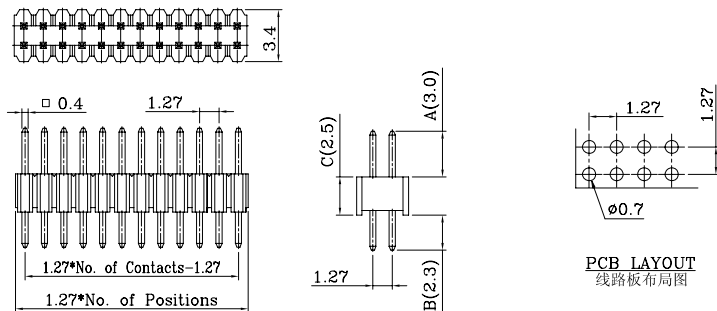

Dual row 06 to 100 contacts/双排6-100芯  
0.4mm Square post/0.4mm四方针  
Base height/塑体高度: 2.5mm standard  
Ordering Code/订购型号:  
201-1/B-S-2\*nPG-3.0/2.5/2.3

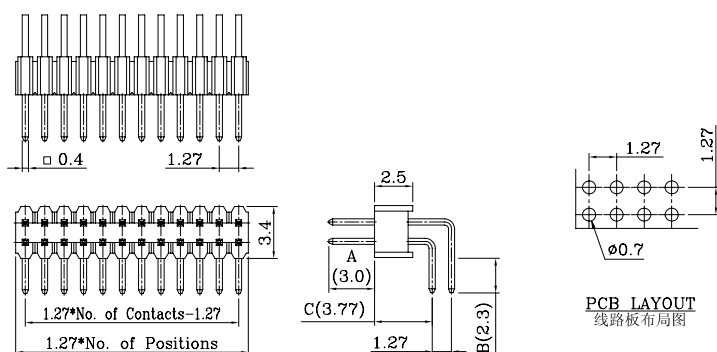




Dual row 06 to 100 contacts/双排6-100芯  
0.4mm Square post/0.4mm四方针  
Base height/塑体高度: 2.5mm standard  
Ordering Code/订购型号:  
201-1/B-R-2\*nPG-3.0/3.77/2.3



PCB LAYOUT  
线路板布局图

Dual row 06 to 100 contacts/双排6-100芯  
0.4mm Square post/0.4mm四方针  
Base height/塑体高度: 2.5mm standard  
W1: With Locating peg/带定位柱




Ordering Code/订购型号:  
201-1/B-SMS-2\*nPG-3.0/2.5/0.4-W1



PCB LAYOUT  
线路板布局图

Dual row 06 to 100 contacts/双排6-100芯  
0.4mm Square post/0.4mm四方针  
Base height/塑体高度: 2.5mm standard

Ordering Code/订购型号:  
201-1/B-DLS-2\*nPG-3.0/6.0/2.3




PCB LAYOUT  
线路板布局图

Dual row 06 to 100 contacts/双排6-100芯  
0.4mm Square post/0.4mm四方针  
Base height/塑体高度: 2.5mm standard  
W1: With Locating peg/带定位柱

Ordering Code/订购型号:  
201-1/B-DLSMS-2\*nPG-3.0/5.0/0.4-W1

Ordering Code/订购型号:



- |   |   |   |
|---|---|---|
| 1. Series No./系列号: 201-1/B  | 3. Poles/位数:<br>2*3P ~ 2*50P  | 5. Pin Dimension/方针尺寸:<br>A/C/B                   |
| 2. PCB Mount Type/安装类型:<br>S = Vertical DIP Type(直插)<br>R = Right Angle DIP Type(弯插)<br>SMS = Vertical SMT Type(立贴)<br>DLS = Dual Bodies Vertical DIP(双塑体直插)<br>DLR = Dual Bodies Right Angle DIP(双塑体弯插)<br>DLSMS = Dual Bodies Vertical SMT(双塑体立贴) | 4. Contacts plating/接触件电镀:<br>S = Selective Gold(半金)<br>G = Gold flash(全金)<br>G3= 3μ" Gold(镀金3μ") | 6. Options/选项:<br>W1 = With Locating<br>peg(带定位柱) |