



Specifications/技术参数:

Electrical/电气特性:
 Current Rating(额定电流): 1A
 Withstand Voltage(耐压值): 500VAC for one minute
 Contact Resistance(接触电阻): 20mΩ max
 Insulation Resistance(绝缘电阻): 1000MΩ min
 Operating Temperature(工作温度): -40°C ~ +105°C


Physical/物理特性:
 Insulator(塑胶本体): P.B.T or PA6T +30%GF, Color Black
 Flammability Rating(防火等级): UL 94V-0
 Contacts(接触件): Phosphor Bronze
 Contacts plating(接触件电镀): Gold flash over Nickel

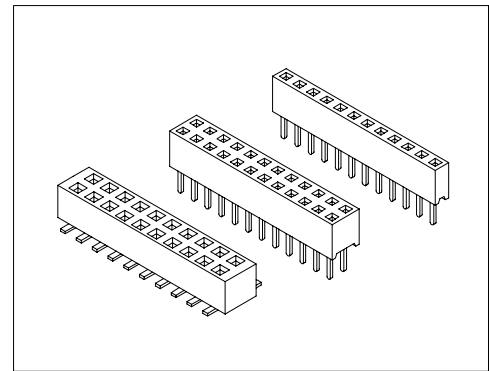


Dimension/尺寸: mm

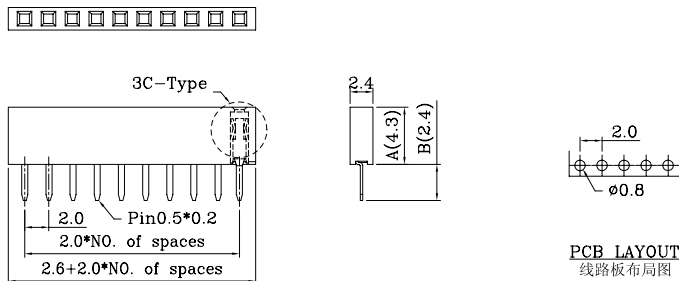



2.00mm Female header/排母
 Single row 04 to 40 contacts/单排4-40芯
 Profile/塑高: 4.3mm
 Pin length/焊板针长: 2.4mm
 Ordering Code/订购型号:
 203-2S-3C-1*nPG-4.3/2.4

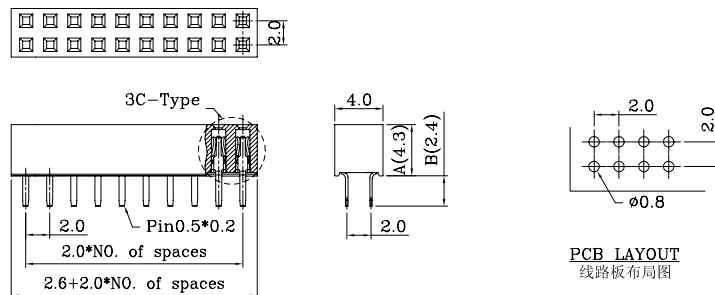

2.00*2.00mm Female header/排母
 Dual row 06 to 80 contacts/双排6-80芯
 Profile/塑高: 4.3mm
 Pin length/焊板针长: 2.4mm
 Ordering Code/订购型号:
 203-2S-3C-2*nPG-4.3/2.4



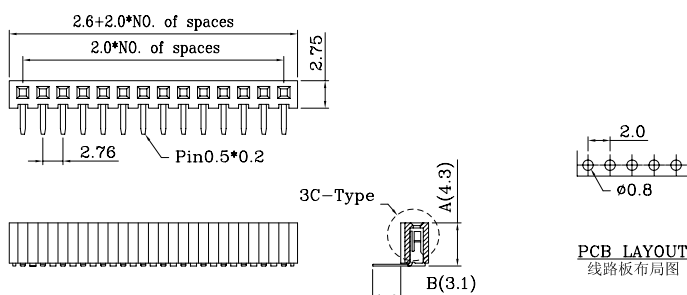


2.00mm Female header/排母
 Single row 04 to 40 contacts/单排4-40芯
 Multi-Mating/波浪型塑体
 Profile/塑高: 4.3mm
 Pin length/焊板针长: 3.1mm
 Ordering Code/订购型号:
 203-2R-3C-1*nPG-4.3/3.1-M

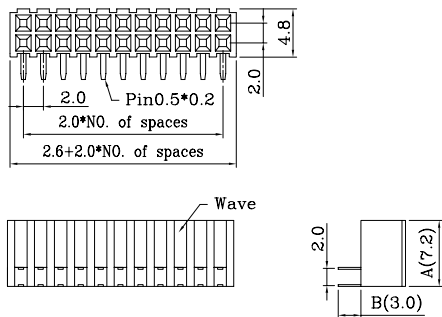



PCB LAYOUT
线路板布局图

2.00*2.00mm Female header/排母
Dual row 06 to 80 contacts/双排6-80芯
Multi-Mating/波浪型塑体
Profile/塑高: 7.2mm
Pin length/焊板针长: 3.0mm
Ordering Code/订购型号:
203-2R-3C-2*nPG-7.2/3.0-M

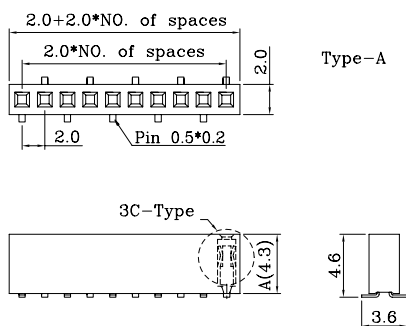

PCB Layout
线路板布局图


2.00mm SMT Female header/贴片排母
Single row 04 to 25 contacts/单排4-25芯
Profile/塑高: 4.3mm
Ordering Code/订购型号:
203-2SMS-3C-1*nPG-4.3-A

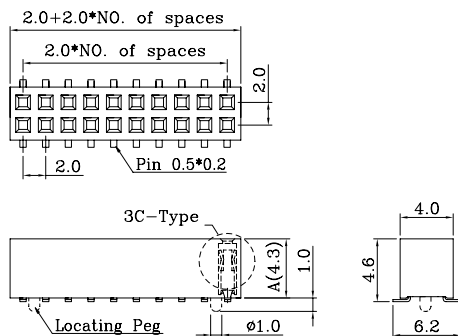

PCB Layout
线路板布局图

2.00*2.00mm SMT Female header/贴片排母
Dual row 06 to 60 contacts/双排6-60芯
Profile/塑高: 4.3mm
W1: With Locating peg/带内定位柱
Ordering Code/订购型号:
203-2SMS-3C-2*nPG-4.3-W1

Ordering Code/订购型号:



- | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Series No./系列号: 203-2</p> <p>2. PCB Mount Type/安装类型:
S = Vertical DIP Type(直插)
R = Right Angle DIP Type(弯插)
SMS = Vertical SMT Type(立贴)</p> <p>3. Contacts Type/接触件类型:
3C = 3C-Type(三面包)</p> | <p>4. Poles/位数:
Single/单排: 1*4P ~ 1*40P
Dual/双排: 2*3P ~ 2*40P</p> <p>5. Contacts plating/接触件电镀:
S = Selective Gold(半金)
G = Gold flash(全金)</p> | <p>6. Dimension/尺寸: A/B</p> <p>7. Options/选项:
A = Type-A (正脚位)
B = Type-B (反脚位)
W1 = With Locating Peg(带内定位柱)
M = Wave Type(波浪形塑体)</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|