

# 57RCS SERIES Centronic Connector Straight Type


## Specifications/技术参数:

### Electrical/电气特性:



Current Rating (额定电流): 3A  
 Withstand Voltage (耐压值): 1000VAC for one minute  
 Contact Resistance (接触电阻): 25mΩ max  
 Insulation Resistance (绝缘电阻): 5000MΩ min  
 Operating Temperature (工作温度): -40°C ~ +105°C

### Physical/物理特性:



Insulator (塑胶本体): Glass Filled Polyester  
 Flammability Rating (防火等级): UL 94V-0  
 Contacts (接触件): Copper alloy  
 Contacts plating (接触件电镀): Selective gold plating on surface contact area

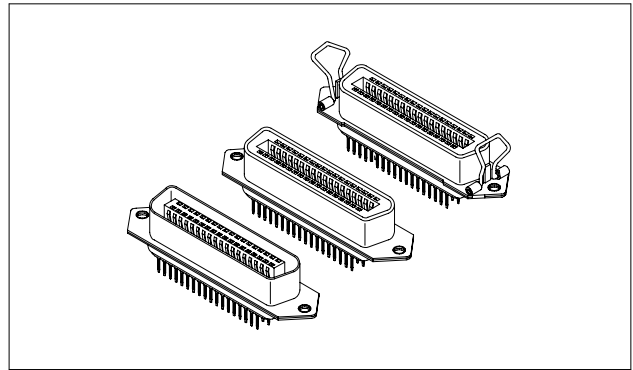



## Dimension/尺寸: mm

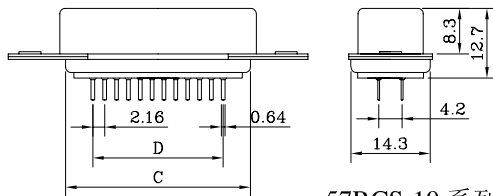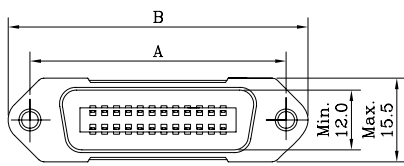



57RCS-10 系列

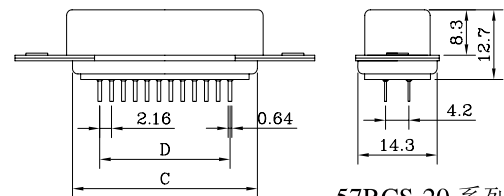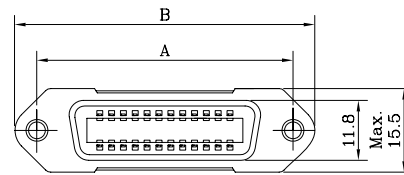

57RCS-20 系列

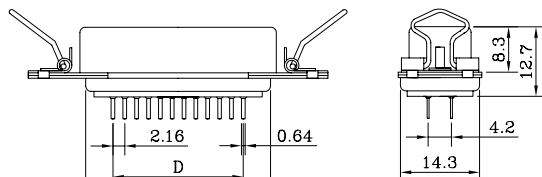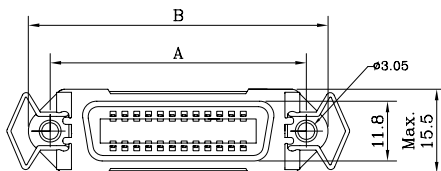


57RCS-40 系列



Poles	Dim A	Dim B	Dim C	Dim D
14	36.0	43.9	22.9	12.96
24	46.8	54.7	33.7	23.76
36	59.7	67.7	46.7	36.72
50	74.9	82.8	61.8	51.84

## Ordering Code/订购型号:



1. Series No./系列号:  
57RCS

2. Contacts type/接触件类型:  
10 = Male(公头)  
20, 40 = Female(母头)

3. Poles/位数:  
14, 24, 36, 50

4. Port Type/端口类型:  
T = Traditional Type(传统式)  
S = Simple Type(简易式)

5. Mounting options/安装选项:

AA = 3.05mm Hole(光孔)  
CA = #4-40UNC Threaded Hole(螺纹孔)

6. Insulator color/胶体颜色:

Default(缺省) = Blue(蓝色)  
3 = Black(黑色)