


Specifications/技术参数:

Electrical/电气特性:


Current Rating (额定电流): 0.5A
 Voltage Rating (额定电压): 50V
 Withstand Voltage (耐压值): 500VAC for one minute
 Contact Resistance (接触电阻): 30mΩ max
 Insulation Resistance (绝缘电阻): 500MΩ min
 Operating Temperature (工作温度): -25°C ~ +85°C

Physical/物理特性:


Insulator (塑胶本体): Nylon46
 Flammability Rating (防火等级): UL 94V-0
 Contacts (接触件): Phosphor Bronze
 Contacts plating (接触件电镀): Tin-plated

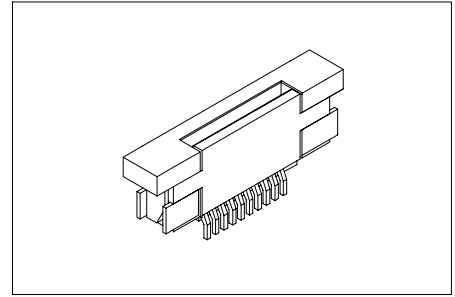


Dimension/尺寸: mm

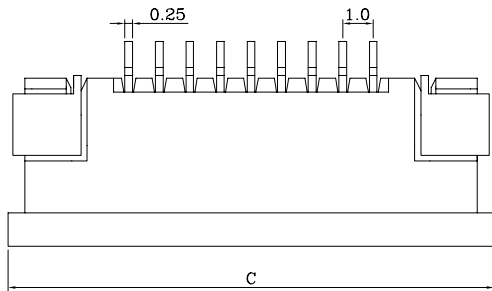




$A = 1.0 * \text{No. of Positions} - 1.0$
 $B = 1.0 * \text{No. of Positions} + 1.1$
 $C = 1.0 * \text{No. of Positions} + 7.0$




Bottom Contact/下触



Upside Contact/上触

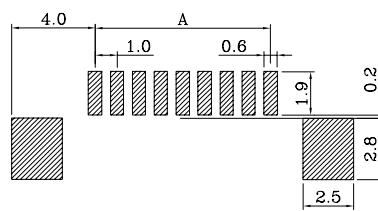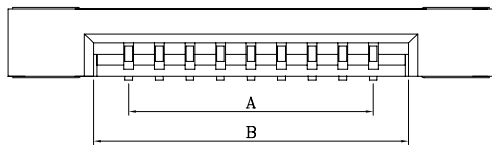


PCB LAYOUT
线路板布局图



Applicable FFC
适用的FFC线

Ordering Code/订购型号:



1. Series No./系列号: 6310
2. PCB Mount Type/安装类型:
SMR = Horizontal SMT (卧贴)
3. Poles/位数:
04P ~ 40P

4. Contact Style/接触方式:
B = Bottom Contact (下触)
U = Upside Contact (上触)
5. Options/选项:
L = With Lock (带锁扣)