
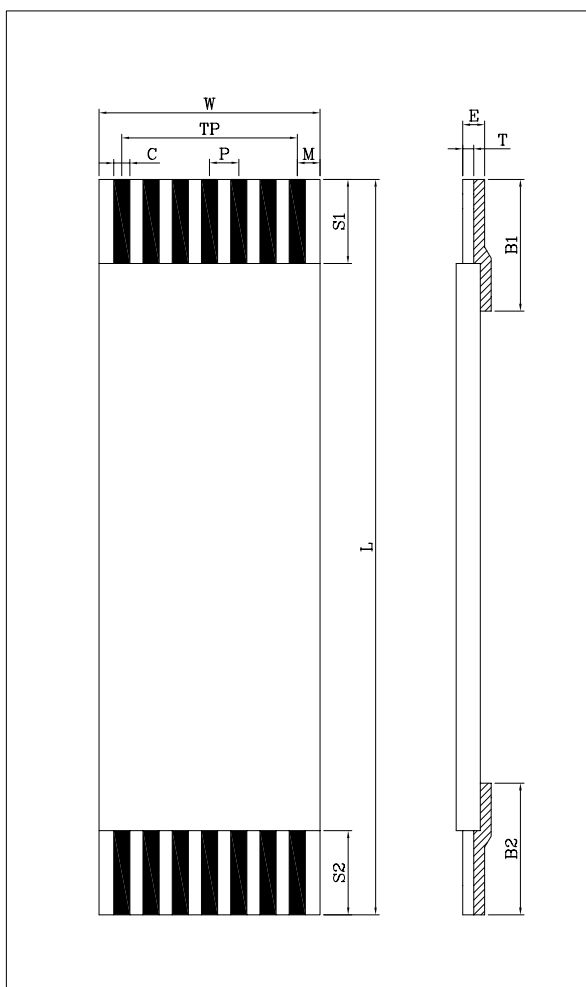


Insulation/绝缘体    
  Conductor/导体    
  Support Tape/加强板

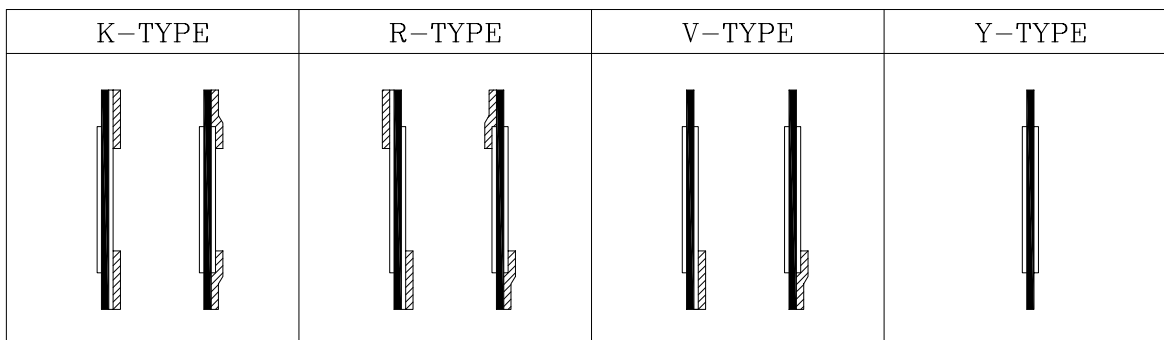

Unit/单位: mm

| Item/项目                               | Standard/标准值  |           |            |            |
|---------------------------------------|---|-----------|------------|------------|
| P (Pitch/间距)                          | 0.50  | 1.00      | 1.25       | 2.54       |
| TP (Total Pitch/总间距)                  | 0.5*(n-1)   | 1.0*(n-1) | 1.25*(n-1) | 2.54*(n-1) |
| W (Cable Width/线宽)                    | 0.5*(n+1)   | 1.0*(n+1) | 1.25*(n+1) | 2.54*(n+1) |
| C (Width/导体宽度)                        | 0.3   | 0.6       | 0.8        | 1.27       |
| M (Margin/线边距)                        | 0.50  | 1.00      | 1.25       | 2.54       |
| T (Thickness/导体厚度)                    | 0.035   | 0.05      | 0.05       | 0.10       |
| E (End Thickness)<br>线末端厚度            | 0.3   |           |            |            |
| S1. S2 (Strip Length)<br>剥头长度         | 3, 4, 5, 6  |           |            |            |
| B1. B2 (Support Tape Length)<br>加强板长度 | 6, 7, 8, 9, 11, 15                                      |           |            |            |
| L (Total Length/总长)                   | 28 ~ 6000   |           |            |            |
| Conductor Material<br>导体材料            | Tin Coated Flat Copper Wire<br>镀锡扁平铜线                   |           |            |            |
| Insulator Material<br>绝缘材料            | Flame Retardant Adhesive<br>on Polyester Film<br>阻燃聚酯薄膜 |           |            |            |

## Ordering Code/订购型号:

1      2      3      4      5      6  
FFC - K - 1.0 - 20P - 100mm - (S1/B1+S2/B2)

- Series No./系列号: FFC
- Terminal Type/线端类型:  
K = K-Type  
R = R-Type  
V = V-Type  
Y = Y-Type

- Pitch/间距:  
0.50 = 0.50mm  
1.00 = 1.00mm  
1.25 = 1.25mm  
2.54 = 2.54mm
- Poles/位数: 04P ~ 60P

- Total Length/总长:  
28 ~ 6000mm
- Options/选项:  
S1. S2 = Strip Length(剥头长度)  
B1. B2 = Support Length(加强板长度)