


Specifications/技术参数:

Electrical/电气特性:


Current Rating (额定电流): 1A
 Withstand Voltage (耐压值): 1000VAC for one minute
 Contact Resistance (接触电阻): 10mΩ max
 Insulation Resistance (绝缘电阻): 1000MΩ min
 Operating Temperature (工作温度): -55°C ~ +125°C

Physical/物理特性:

Insulator (塑胶本体): PBT
 Flammability Rating (防火等级): UL 94V-0
 Sleeve (套筒): Brass
 Contact clip (接触片): Beryllium copper
 Mating pin (配合圆针): $\varnothing 0.40$ to $\varnothing 0.56$ mm
 Insertion Force (插入力): 2N typ (在用 $\varnothing 0.43$ mm钢针的情况下)
 Withdrawal Force (拉出力): 1N typ (在用 $\varnothing 0.43$ mm钢针的情况下)
 Mechanical life (机械寿命): 100 cycles min

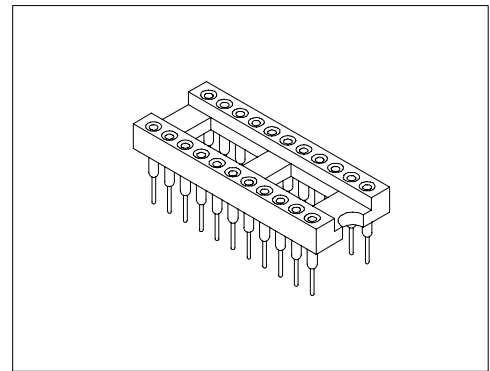

Dimension/尺寸: mm

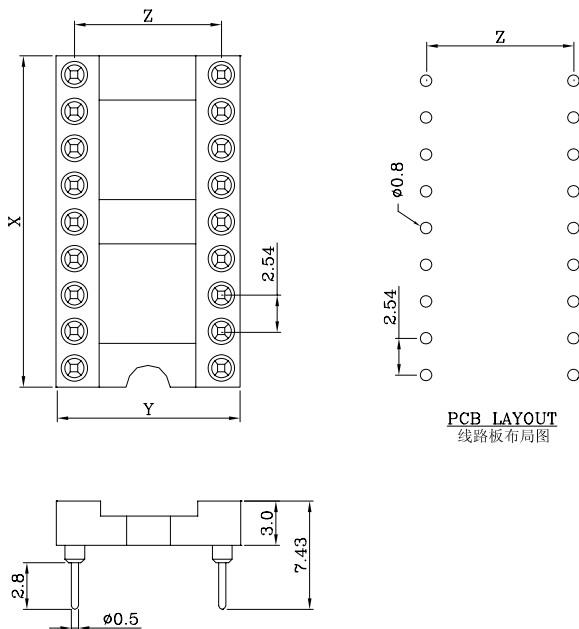

Poles 位数	Part No 产品型号	Dimensions/尺寸		
		X	Y	Z
6	6200-06PS-7.62	7.6	10.16	7.62
8	6200-08PS-7.62	10.1		
10	6200-10PS-7.62	12.6		
12	6200-12PS-7.62	15.2		
14	6200-14PS-7.62	17.7		
16	6200-16PS-7.62	20.3		
18	6200-18PS-7.62	22.8		
20	6200-20PS-7.62	25.3		
22	6200-22PS-7.62	27.8		
24	6200-24PS-7.62	30.4		
28	6200-28PS-7.62	35.5	12.70	10.16
20	6200-20PS-10.16	25.4		
22	6200-22PS-10.16	27.8		
24	6200-24PS-10.16	30.4		
28	6200-28PS-10.16	35.5		
32	6200-32PS-10.16	40.6		
24	6200-24PS-15.24	30.5	17.78	15.24
28	6200-28PS-15.24	35.5		
32	6200-32PS-15.24	40.6		
36	6200-36PS-15.24	45.7		
40	6200-40PS-15.24	50.8		
42	6200-42PS-15.24	53.3		
48	6200-48PS-15.24	60.9		
50	6200-50PS-15.24	63.5		
52	6200-52PS-15.24	66.0	25.40	22.86
50	6200-50PS-22.86	63.5		
52	6200-52PS-22.86	66.0		
64	6200-64PS-22.86	81.2		

Ordering Code/订购型号:

1 2 3 4
6200 — nP S — Z

1. Series No./系列号: 6200

2. Poles/位数:

06P,08P,10P,12P,14P,16P,18P
 20P,22P,24P,28P,32P,36P,40P
 42P,48P,50P,52P,64P.

3. Contact Plating/接触件电镀:

S = Selective Gold(半金)

G = Gold Flash(全金)

4. Linewidth/行距:

Z = 7.62, 10.16, 15.24, 22.86