

# 5321 SERIES Modular Jack Side Entry Dip Type


## Specifications/技术参数:

### Electrical/电气特性:


Current Rating (额定电流): 1.5A  
 Withstand Voltage (耐压值): 1000VAC for one minute  
 Contact Resistance (接触电阻): 35mΩ max  
 Insulation Resistance (绝缘电阻): 1000MΩ min  
 Operating Temperature (工作温度): -40°C ~ +85°C

### Physical/物理特性:

Insulator (塑胶本体): P.B.T  
 Flammability Rating (防火等级): UL 94V-0  
 Contacts (接触件): Phosphor Bronze  
 Contacts plating (接触件电镀): Gold Plating over Nickel

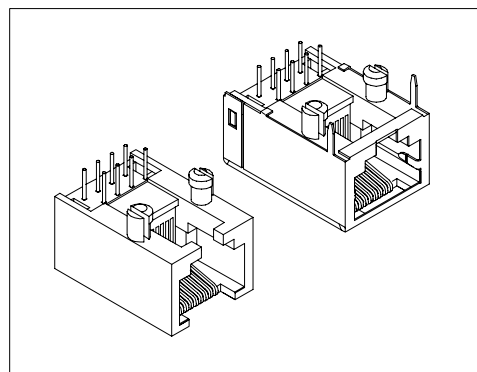


## Dimension/尺寸: mm

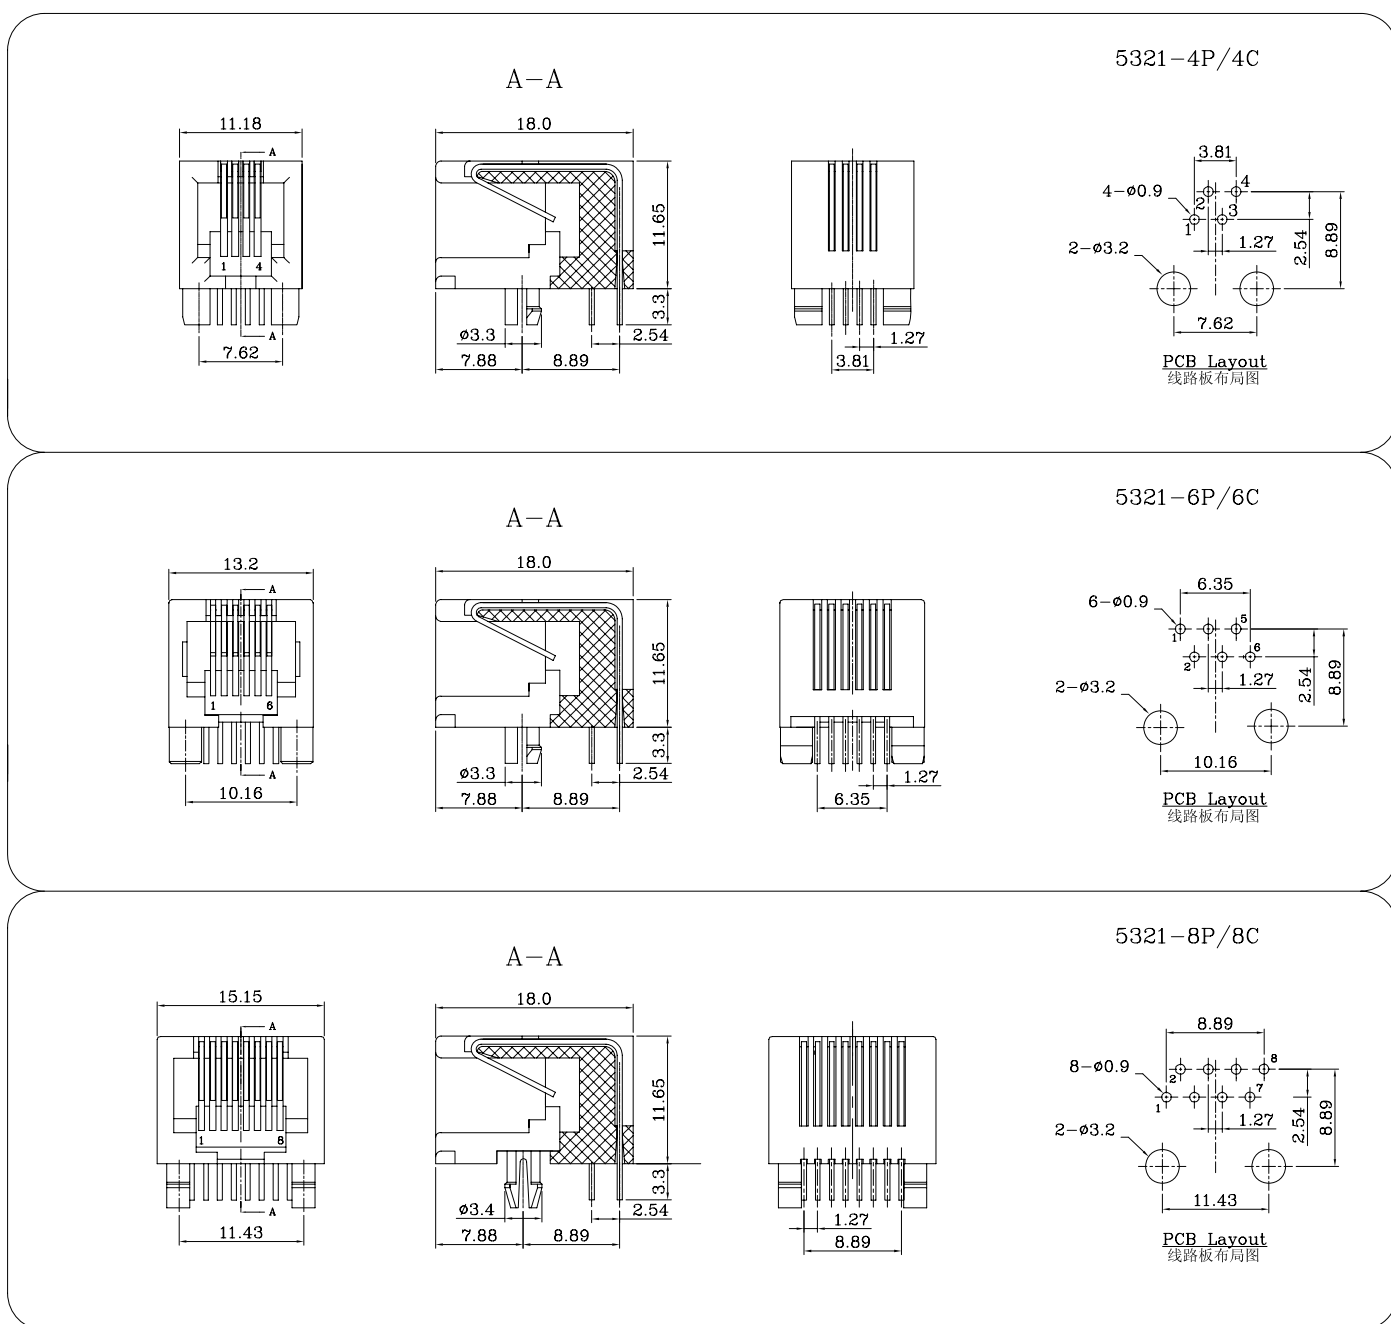


# 5321 SERIES Modular Jack Side Entry Dip Type

Dimension/尺寸: mm

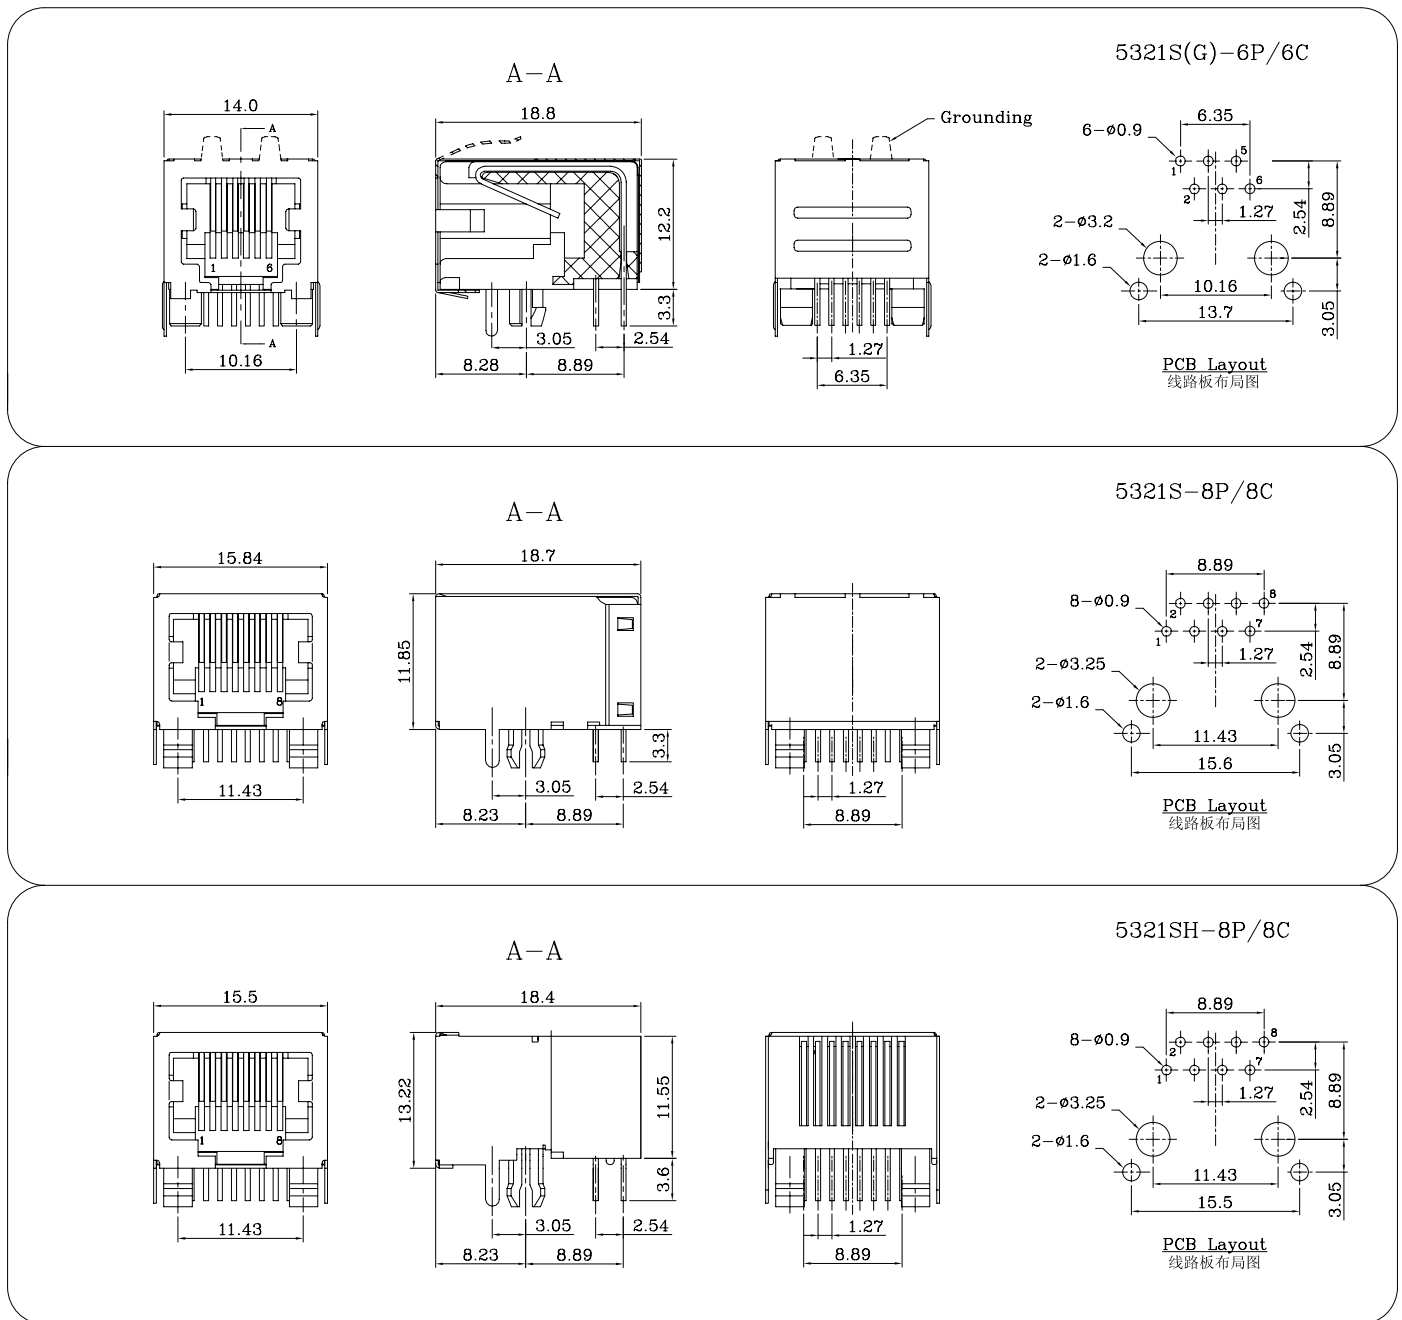

## Ordering Code/订购型号:



1. Series No./系列号: 5321

2. Shield Options/屏蔽层选项:

S = Shield(全屏蔽)

SH = Half the Shield(半屏蔽)

N/A(缺省) = W/O Shield(不带屏蔽)

3. EMI Options/选项:

G = With Grounding(带接地弹片)

N/A(缺省) = W/O Grounding(无接地弹片)

4. Slot Number/槽数: 4P, 6P, 8P

5. Contacts Number/芯数: 4C, 6C, 8C