

8100 SERIES Din Plug Assembly Type

Specifications/技术参数:

Electrical/电气特性:



Current Rating (额定电流): 2A
 Withstand Voltage (耐压值): 500VAC for one minute
 Contact Resistance (接触电阻): 20mΩ max
 Insulation Resistance (绝缘电阻): 100MΩ min. at DC 500V
 Operating Temperature (工作温度): -25°C ~ +70°C

Physical/物理特性:


Insulator (塑胶本体): Thermoplastic Polyester Glass Filled UL 94V-0
 Bottom cover (底盖): Thermoplastic Polyester Glass Filled UL94V-2
 Contacts (接触件): Copper Alloy, Nickel Plated
 Metal Housing (金属外壳): Nickel Plated



Dimension/尺寸: mm

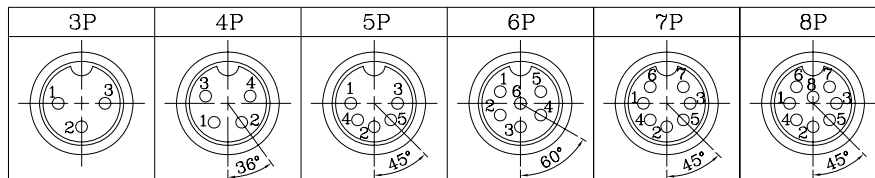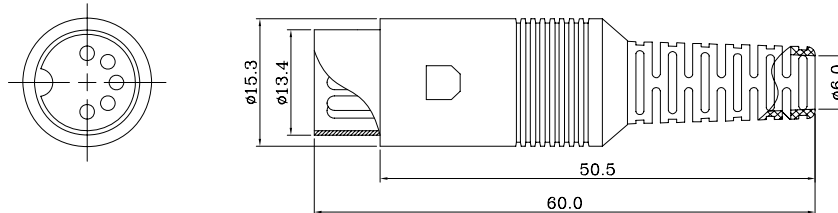

Ordering Code/订购型号:



1. Series No./系列号: 8100
2. Contact type/接触件类型: P = Plug(插头公针)
3. Housing type/壳体类型: A = Assembly(装配型)
4. Poles/位数: 3P, 4P, 5P, 6P, 7P, 8P